

VISCOUS DAMPED LOAD CELL ASSEMBLY FOR DYNAMIC WEIGHING APPLICATIONS

capacities 5kg - 35kg



Process weighing problems solved simply and cost effectively.


The T16 load cell is specifically designed as a reliable, simple, low cost solution for dynamic weighing allowing faster setting time, higher weighing speeds and increased load cell life. For wash down applications a special venting kit, supplied with the unit, can be fitted which ensures IP68 protection levels. A stainless steel cover is also fitted to protect the weighing head.

Particularly suited to high speed check-weighing applications and form, fill, seal machinery. Suitable for weighing platforms up to 500 x 500mm.

- Double bending beam load cell
- 316 stainless steel housing
- Viscous damping especially for use in dynamic applications
- IP68 protection using supplied venting kit
- 4000 division OIML R60 class C accuracy
- Integral single point load cell allows off-centre loading
- Integrated on-centre overload protection
- Dual stopper for bi-directional overload protection
- 2 year warranty
- Durable and chemical resistant polyurethane cable

T16


technical specification...

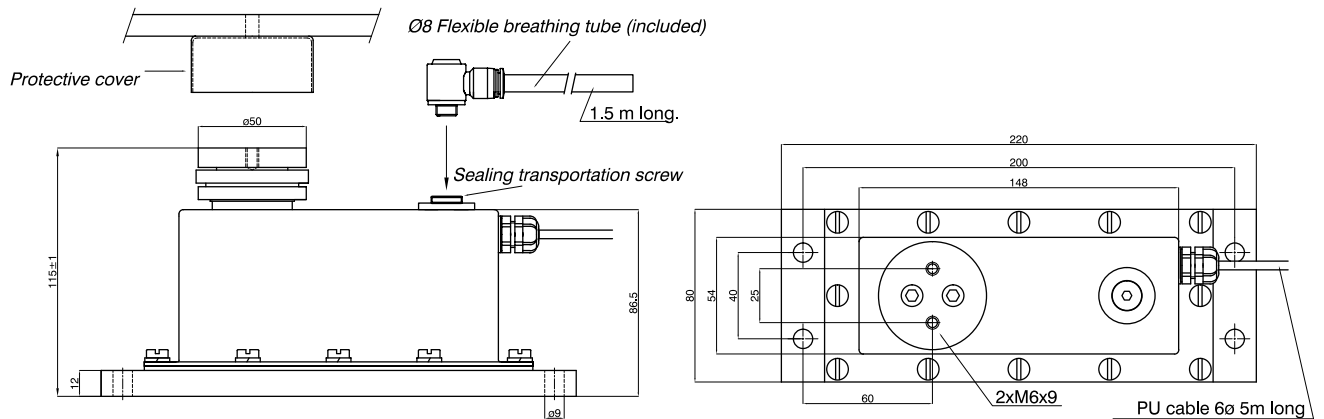

T16 Load Cell

	Load cell specification	Units
Load Cell Capacities	5, 7.5, 10, 15, 20, 35	kg
Full Load Output	2.0 +/- 10%	mV/V
Excitation Recommended	10	V
Excitation Maximum	15	V
Safe Service Load	120	%*
Ultimate Load	150	%*
Minimum Dead Load	0	%*
Accuracy Class	4000	n.OIML
Combined Error	< +/- 0.013	%*
Repeatability	< +/- 0.01	%*
Creep error (30 minutes)	< +/- 0.012	%*
Output at Zero Load	+/- 2.0	%*
Input Resistance	400 +/- 20	Ω
Output Resistance	350 +/- 3	Ω
Operational Temperature Range	-20 to +70	°C
Compensated Temperature Range	-10 to +40	°C
Temperature Coefficient on Zero	< +/- 0.002	%* / °C
Temperature Coefficient on Span	< +/- 0.0012	%* / °C
Environmental Protection	IP66 (IP68 with venting kit fitted)	
Insulation	> 5000	MΩ
Cable Length	5	m
Cable Material	Polyurethane	
Venting Tube Length	1.5	m
Nominal Shipping Weight	4	kg

*All percentages are related to Full Rated Load



Electrical Connections

Via 6 wire, 5.7mm diameter, screened polyurethane cable.

Screen not connected electrically to load cell.

DISTRIBUTED BY:



THAMES SIDE SENSORS LTD

Unit 10, io Trade Centre, Deacon Way, Reading, Berkshire RG30 6AZ

tel: +44 (0) 118 941 1387

fax: +44 (0) 118 941 2004

sales@thames-side.co.uk

www.thames-side.com



Issue: T16.07.13

Our policy is one of continuous product enhancement. We therefore reserve the right to incorporate technical modifications without prior notification.